




VERMONT



GRESART.
CERAMIC TILES

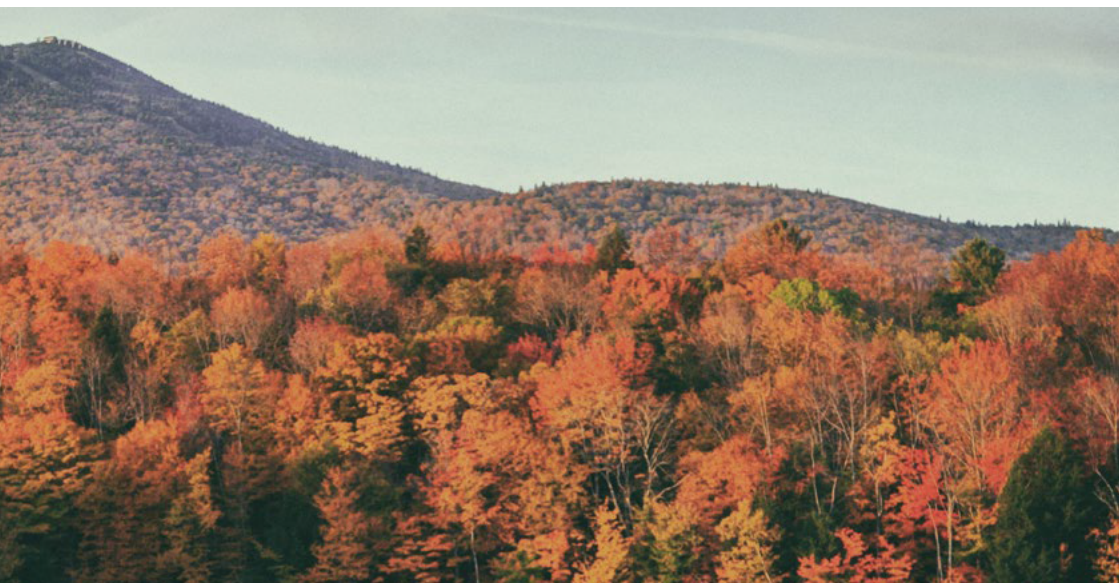



20X120 R

6 COLORS
1 SIZE
20X120 R

—
X30 GRAPHICS
X2 ENGRAVINGS

Vermont is a dazzling new ceramic wood effect using real secular timber as canvas and the latest system of digital print on ceramics, capturing the true veining effects in each and every plank multiplied by up to 30 different patterns for each color to create the natural irregularity of the real wood marked by time giving the floor the utmost refinement and natural effect maintaining unchangeable aesthetic and resistance features suitable for residential or commercial application.



Brown

Grey

Ash

Cream

Khaki

Taupe



The surface is brushed to reproduce the effect of the real aged woods.

Vermont Taupe 20x120 R





The natural irregularity of the real wood
marked by time.

Vermont Cream 20x120 R








VERMONT CREAM



Vermont Cream
GP 0648
20x120 R




Rodapé / Skirtings
Degrau / Step



VERMONT **TAUPE**



Vermont Taupe
GP 0649
20x120 R




Rodapé / Skirtings
Degrau / Step



VERMONT **KHAKI**



Vermont Khaki
GP 0647
20x120 R




Rodapé / Skirtings
Degrau / Step



VERMONT BROWN



Vermont Brown
GP 0650
20x120 R




Rodapé / Skirtings
Degrau / Step



VERMONT GREY



Vermont Grey
GP 0646
20x120 R




Rodapé / Skirtings
Degrau / Step



VERMONT **ASH**



Vermont Ash
GP 0645
20x120 R




Rodapé / Skirtings
Degrau / Step

SUSTAINABILITY



WE MEET
LEED™ AND **BREEAM**®
REQUIREMENTS

Ceramic Product, references of GRESART	% recycled material included	Sources:
Floor tiles: Glazed ceramic, Glazed porcelain	25-27%	Internal quality data; internal wastes from the process
Wall tiles: White body, Mariposa	28%	External data; external wastes




ECO-BODY



28%
RECYCLED

THIS PRODUCT IS
LEED ACCORDANT


ÉMISSIONS DANS L'AIR INTÉRIEUR*



A+

A+ A B C

GRÉS PORCELÂNICO • GLAZED PORCELAIN
GRÈS CÉRAMÉ • FEINSTEINZEUG




10,5mm

20x120 Rectified

Espessura • Thickness

FULL HD DIGITAL PRINTING TECHNOLOGY

VARIAÇÕES DE TONALIDADE • VARIATION IN TONE
VARIATIONS DE TONALITÉ • FARBABWEICHUNG



V4

Aleatória • Random • Warnung • Aleatoria

FORMAS DE APLICAÇÃO • TILING INSTRUCTIONS
FAÇONS DES POSE • VERLEFUNGARTEN


Aplicação em contrafiada não recomendada a mais de 1/3 da peça.

It's not recommended laying the pieces more than 1/3 of the length of the tile.

Pose conseillée avec un décalage entre chaque carreau non supérieur à 1/3 de la longueur du carreau même.


Bei einer versetzten Verlegung empfehlen wir 2/3 [zweidrittel] Verbandverlegung.

Correto / Correct



1/3 Peça • Piece • Carreaux

Incorreto / Incorrect



1/2 Peça • Piece • Carreaux

RESISTÊNCIA AO ESCORREGAMENTO • SLIP RESISTANCE
RÉSISTANCE AO GLISSAGE • RUTSCHFESTIGKEIT

NORMA • STANDARD • NORME • NORM: DIN 51130 / ANSI A326.3



CATEGORIA
CLASSE
CLASSEMENT
KATEGORIE

R10

DCOF
COEFICIENTE FRICÇÃO
COEFFICIENT OF FRICTION
COEFFICIENT DE FROTTEMENT
REIBUNGSKOEFFIZIENT

0,42

Gresart - Cerâmica Industrial S.A.

Apartado 39 - EC de Oliveira do Bairro | 3771-954 Oliveira do Bairro | Portugal

Tel. +351 234 740 200 | Fax. +351 234 747 462

gresart@gresart.com | www.gresart.com












100% MADE IN PORTUGAL



TECHNICAL DATA

Grés Porcelânico Vidrado
Glazed Porcelain Tiles
Grés Cérame Émaillé
Feinsteinzeug Glasiert
Grés Porcelánico

EN 14411:2012	Características Técnicas Technical Data Caractéristiques Techniques Technische Daten Datos Tecnicos	Norma de Ensaio Test Norm Norme du Test Testnormen Norma de Prueba	Anexo • Annex Annexe • Anhang	G BI _a	GRESART [®] CERAMICA
	Comprimento e Largura Length and Width Longueur et Largeur Länge und Breite Longitud y Anchura			± 0,6 %	Garantido Guaranted Garanti Gewährleistet Garantizado
	Espessura Thickness Épaisseur Dichte Grosor			± 5 %	Garantido Guaranted Garanti Gewährleistet Garantizado
	Rectilinearidade das Arestas Edge Warpages Rectitude des Arêtes Geradlinigkeit der Kanten Rectitud de los Bordos	EN ISO 10545-2		± 0,5 %	Garantido Guaranted Garanti Gewährleistet Garantizado
	Medida da Ortogonalidade Rectangularity Angularité Rechtwinkligkeit der Kanten Grado de Ortogonalidad			± 0,5 %	Garantido Guaranted Garanti Gewährleistet Garantizado
	Medida da Planaridade Surface Flatness Planéité de la Superficie Ebenflächigkeit Medición de Planaridad			± 0,5 %	Garantido Guaranted Garanti Gewährleistet Garantizado
	Absorção de Água Water Absorption Absorption D'eau Wasseraufnahme Absorción de Agua	EN ISO 10545-3		E _w ≤ 0,5%	Garantido Guaranted Garanti Gewährleistet Garantizado
	Resistência à Flexão Breaking Strength Résistance à la Flexion Biegefestigkeit Resistencia a la Flexión	Módulo de Rutura Modulus of Rupture Module de Rupture Bruchmodul Módulo de Rotura	EN ISO 10545-4	≥ 35 N/mm ²	Garantido Guaranted Garanti Gewährleistet Garantizado
		Força de Rutura Breaking Strength Force de Rupture Bruchfestigkeit Resistencia a la Rotura		≥ 1300 N	Garantido Guaranted Garanti Gewährleistet Garantizado
	Resistência à Abrasão Resistance to Abrasion Résistance à L'abrasion Abnutzungsbeständigkeit Resistencia a la Abrasion		EN ISO 10545-7	Segundo os Valores do Fabricante According to Manufacturer Requirements Selon les Valeurs du Fabricant Gemäss der Werte des Herstellers Según los Valores del Fabricante	Indicação na Tabela de Preços Indication on Price List Indication sur la Liste de Prix Hinweis auf der Preisliste Indicación en la Tabla de Precios
	Resistência ao Choque Térmico Resistance to Thermal Shock Résistance aux Chocs Thermiques Resistenz Gegen Thermischen Schock Resistencia ao Choue Térmico		EN ISO 10545-9	Exigido Required Exigée Gefordert Exigido	Garantido Guaranted Garanti Gewährleistet Garantizado
	Resistência ao Fendilhamento Cracking Resistance Résistance aux Tréanillures Abnutzungsbeständigkeit Resistencia a lo Agrietado		EN ISO 10545-11	Exigido Required Exigée Gefordert Exigido	Garantido Guaranted Garanti Gewährleistet Garantizado
	Resistência ao Gelo Frost Resistance Résistance au Gel Frostbeständigkeit Resistencia al Hielo		EN ISO 10545-12	Exigido Required Exigée Gefordert Exigido	Garantido Guaranted Garanti Gewährleistet Garantizado
	Resistência aos Ácidos e Bases Resistance against Acids and Bases Résistance aux Acides et Bases Beständigkeit Gegen Säuren u Laugen Resistencia a los Ácidos y Bases		EN ISO 10545-13	Segundo os Valores do Fabricante According to Manufacturer Requirements Selon les Valeurs du Fabricant Gemäss der Werte des Herstellers Según los Valores del Fabricante	Mínimo: GLB Minimum: GLB Minimum: GLB Minimum: GLB Minimum: GLB
	Resistência aos Produtos de Limpeza Domesticos Resistance to Household Cleaning Products Résistance aux Produits Ménagers de Nettoyage Beständigkeit Gegen Haushaltsprodukte Resistencia a los Productos de Limpieza Domésticos			Mínimo: GB Minimum: GB Minimum: GB Minimum: GB Minimum: GB	Garantido Guaranted Garanti Gewährleistet Garantizado
	Resistência às Manchas Staining Resistance Résistance aux Taches Beständigkeit Gegen Flecken Resistencia a las Manchas		EN ISO 10545-14	Mínimo: Classe 3 Minimum: Class 3 Minimum: Classe 3 Minimum: Klasse 3 Minimum: Clase 3	Garantido Guaranted Garanti Gewährleistet Garantizado



GRESART 
CERAMIC TILES